



藝林機械五金有限公司

IKLIM HARDWARE & MACHINERY SDN. BHD.


(No. Syarikat: 22456-W)

No. 23, Jalan 8/91, Taman Shamelin Perkasa, 56100 Cheras, Kuala Lumpur.

Tel: 603-92848333, 92848411, 92848172, 92847890 Fax: 603-9282 3685

Website: www.iklim.com.my E-mail: ihmsb@po.jaring.my.

Gear Pump

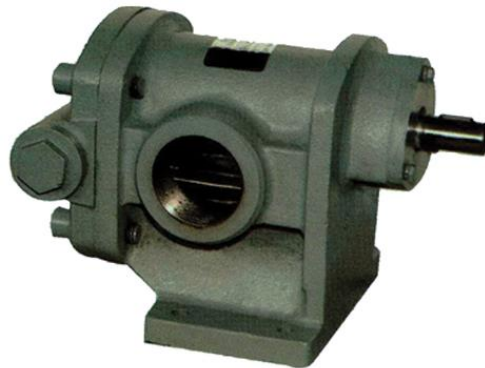

Features :

Since the pump is high-quality, finished at the same accuracy as hydraulic pump, it can be applied to a wide range of activities from low-viscosity oil such as kerosene, light oil, etc. to medium/high-viscosity oil. Since the pump is a bypass valve built-in type, and is equipped with relief function, it can be used safely.

Model	Connection Dia (mm)	Power (kw)	Standard Delivery Pressure (kg/cm ²)	Gross Weight (KG)	Delivery Volume
					50 HZ 1500 RPM
GL-25	25mm (1")	1.5	1-5	9	48Q/min
		2.2	1-10		12.7 USG/min
GL-32	32mm (1-¼")	2.2	1-5	11	73Q/min
		3.7	1-10		19.3 USG/min
GL-40	40mm (1-½")	2.2	1-5	21	95Q/min
		5.5	1-10		25.1 USG/min
GL-50	50mm (2")	3.7	1-5	23	150Q/min 39.6 USG/min

**** Specification are subject to change without prior notice ****