


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹ HS= 0 m

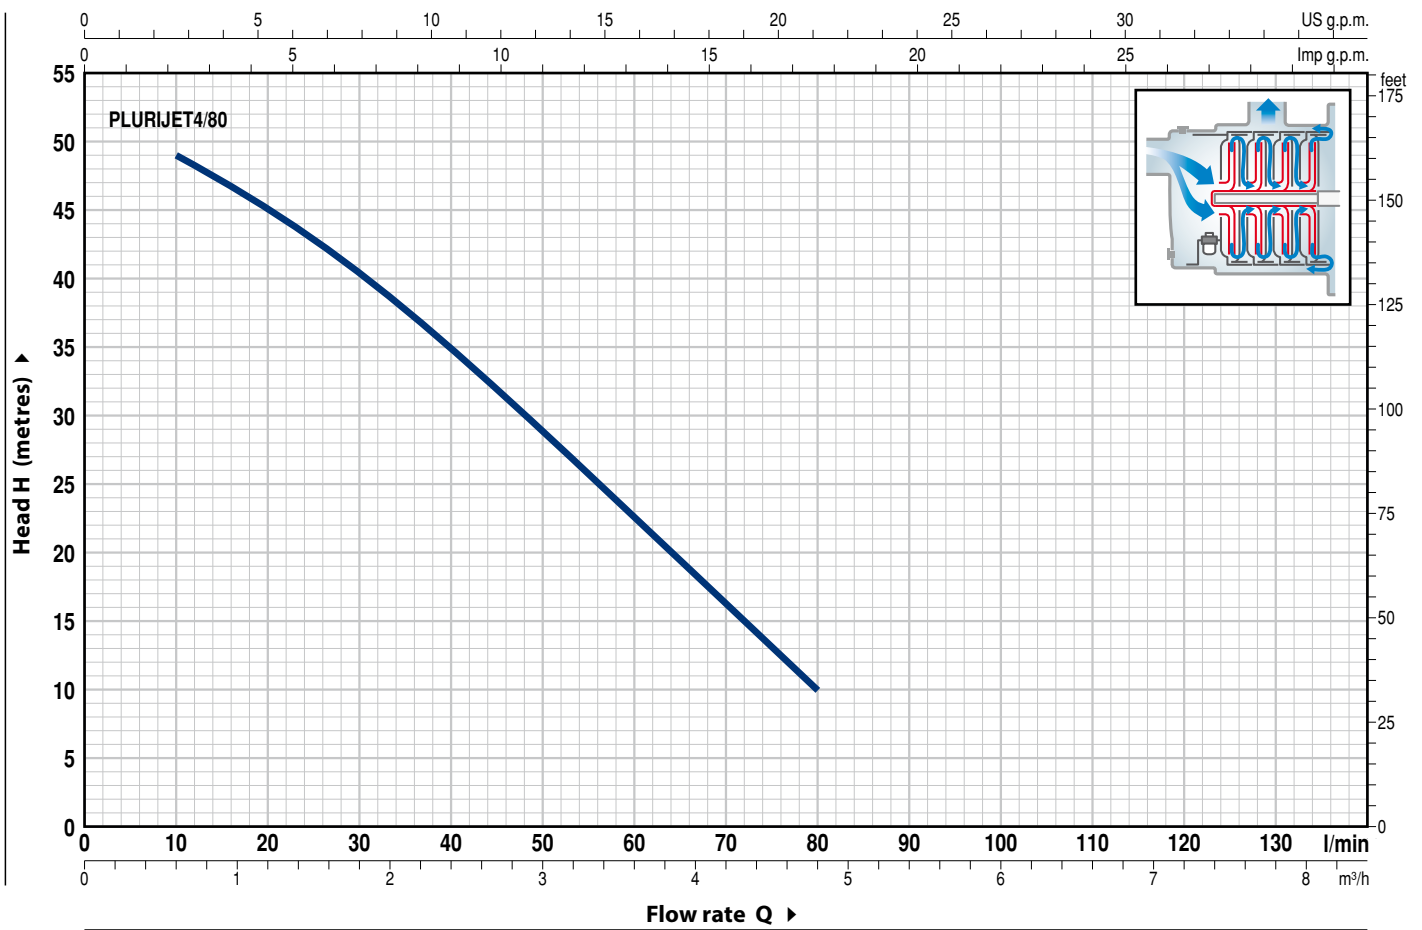

MODEL	POTENZA (P ₂)		Q	Flow rate														
	kW	HP ▲		m ³ /h	0	0.3	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2
Single Phase			l/min	0	5	10	20	30	40	50	60	70	80	90	100	110	120	130
PLURIJETm 4/80	0.55	0.75	IE2	H metri	52	50	49	44.5	40	34	28.5	22.5	16	10				

Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

▲ Three-phase motor efficiency class (IEC 60034-30-1)

STANDARD INSTALLATION

