


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹ HS= 0 m

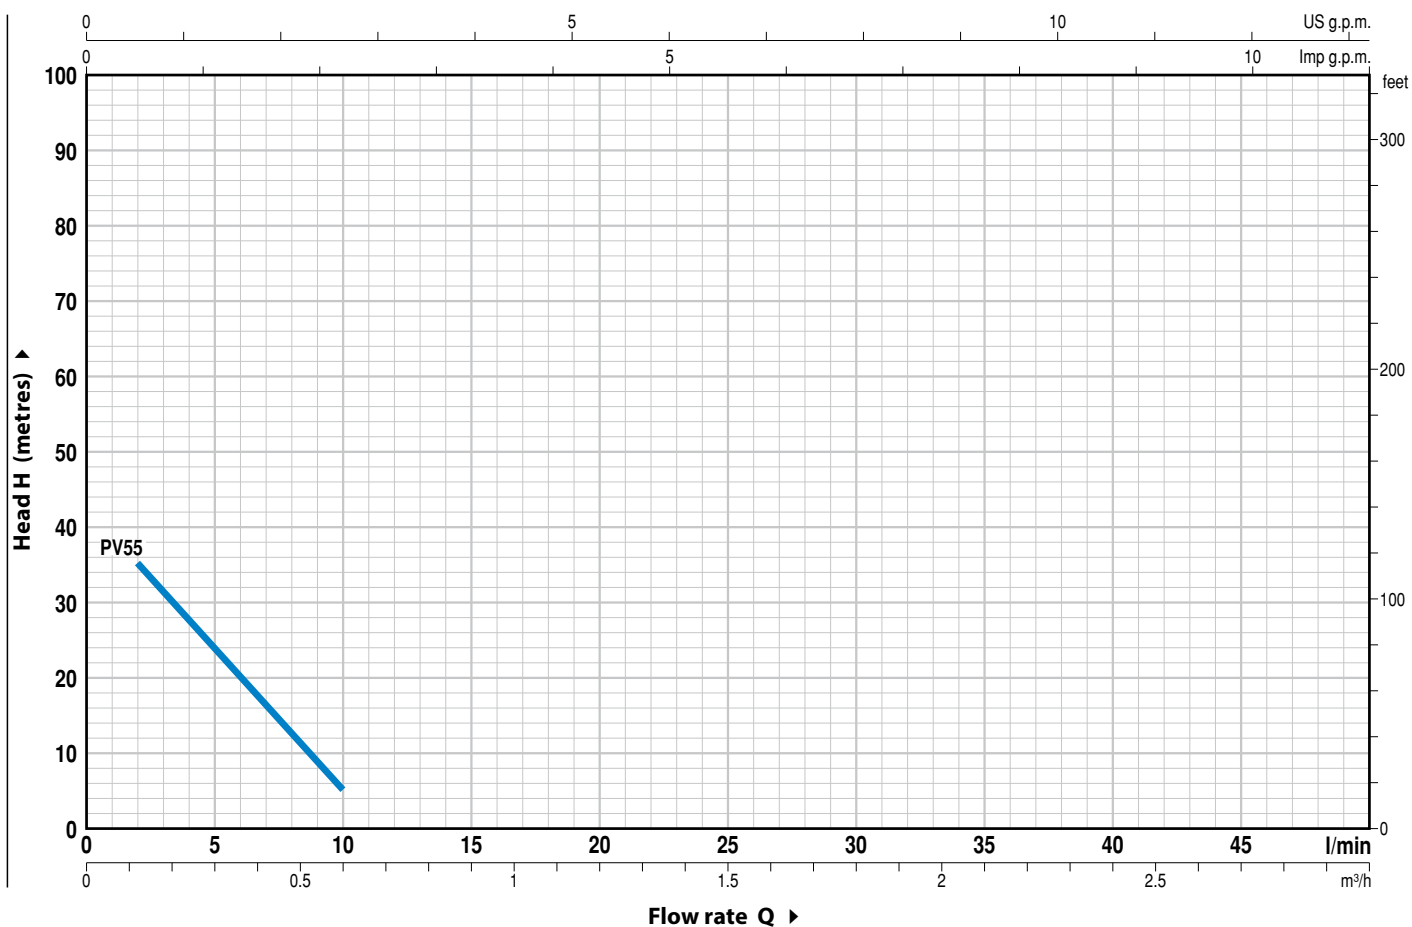

MODEL		POWER (P ₂)			Q	Q										
Single-phase	Three-phase	kW	HP	▲		m ³ /h	0	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.54	0.60
					H metres	l/min	0	2	3	4	5	6	7	8	9	10
PVm 55	-	0.18	0.25	IE3	50 Hz	42	35	31	27.5	24	20	16	12.5	9	5	

Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

▲ Three-phase motor efficiency class (IEC 60034-30-1)