


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹

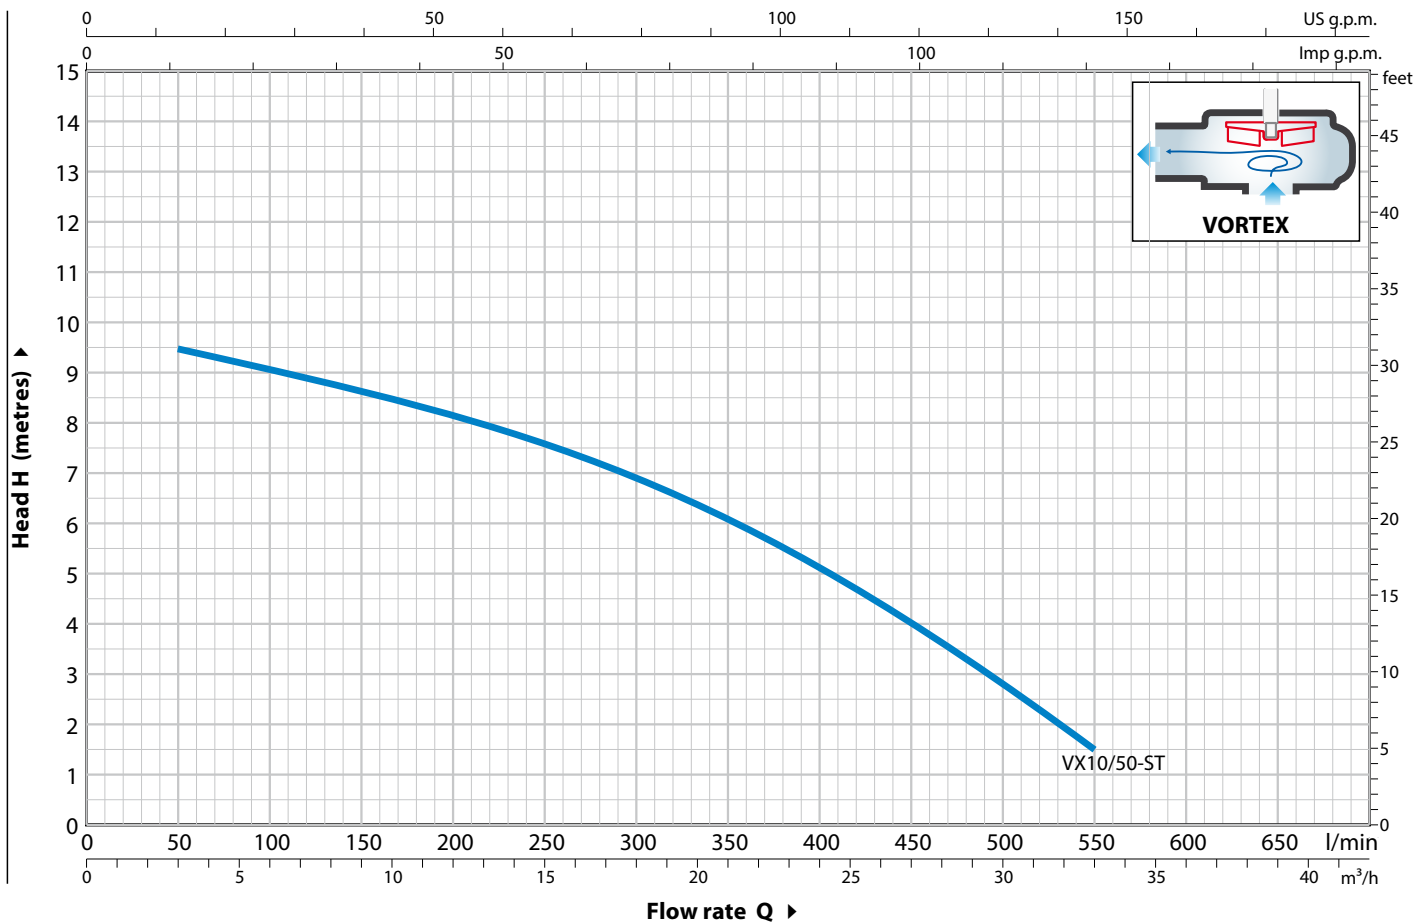

MODEL	POWER (P ₂)		Q	0	3	6	12	18	21	24	27	30	33	36	39
	kW	HP		0	50	100	200	300	350	400	450	500	550	600	650
Single-phase															
VXm 10/50-ST	0.75	1	H metres	10	9.5	9.2	8.5	7	6	5	3.8	2.7	1.5		

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.