


TISSEL-200 CR

CHARACTERISTIC CURVES $n=2900 \text{ min}^{-1}$

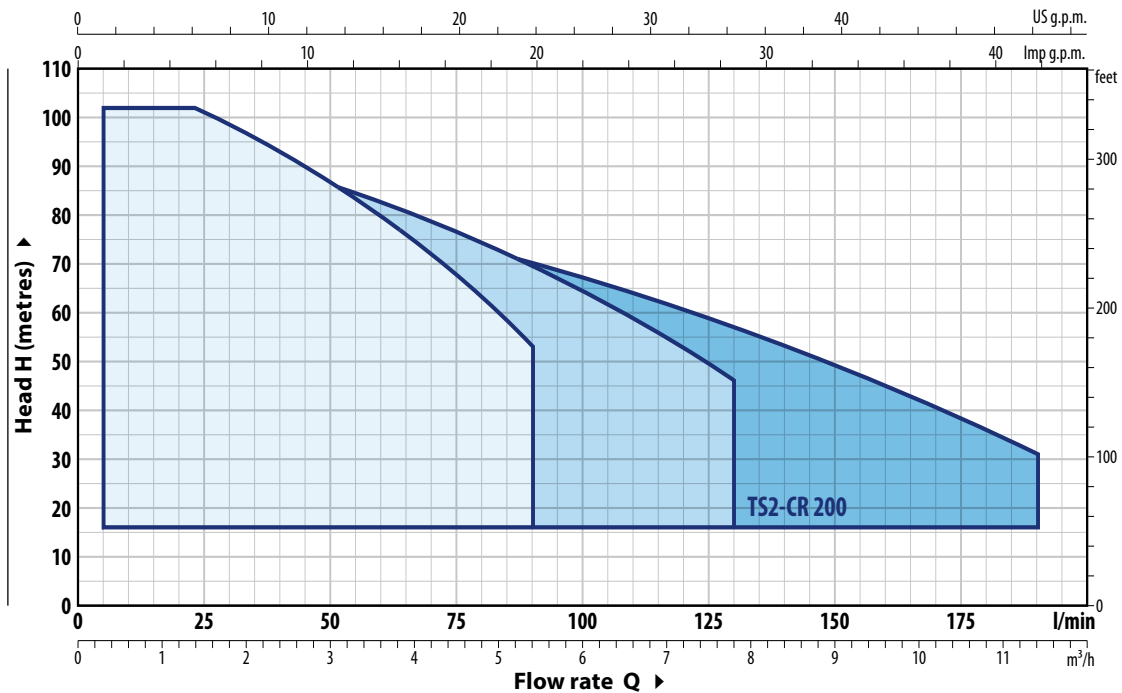

MODEL	POWER		ABSORPTION	MAX PERFORMANCES		PERFORMANCES (ADJUSTABLE SET POINT)						
	P2	▲		Q	H	Min. Set Point		Set Point Stand. Setting		Max. Set Point		
Single-phase	kW	HP	230 V	l/min	metres	bar	l/min	bar	l/min	bar	l/min	
TS2-3CR 200	1.1	1.5	IE3	10.0 A	5 – 200	43 – 13	1.60	5 – 185	2.80	5 – 133	3.80	5 – 72
TS2-4CR 200	1.5	2		13.0 A	5 – 200	57 – 17	2.10	5 – 185	3.60	5 – 133	5.10	5 – 65