


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹

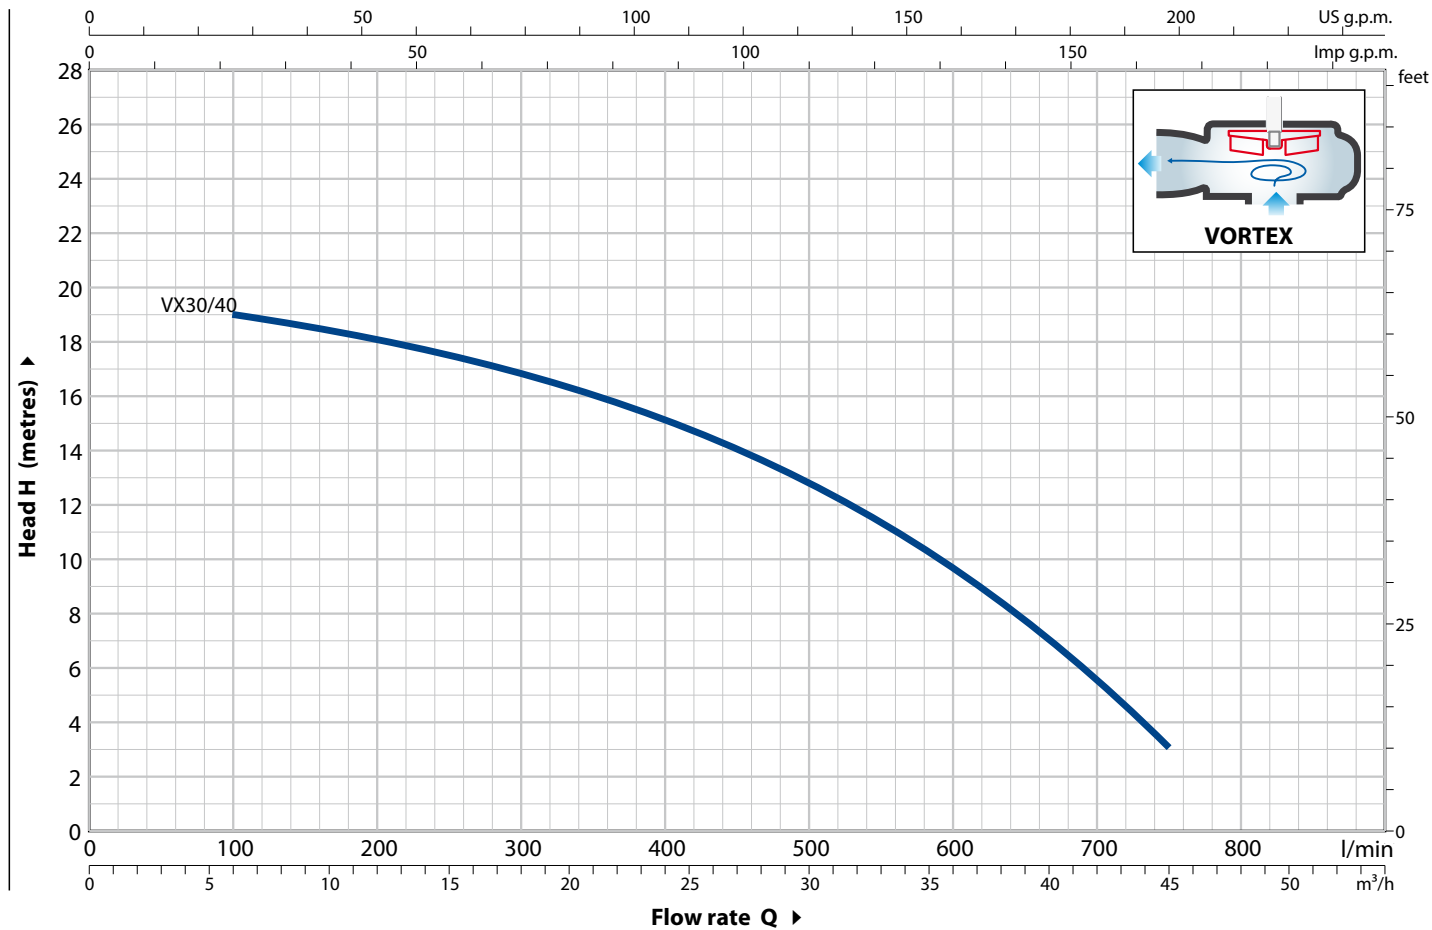

MODEL		POWER (P ₂)		Q m ³ /h l/min	0	6	12	18	24	30	36	42	45	48	51
Single-phase	Three-phase	kW	HP		0	100	200	300	400	500	600	700	750	800	850
-	VX 30/40	2.2	3		20	19	18	17	15	13	9.6	5.5	3		

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.